

Kiosk Thermal Printer




WP-K657

Printing speed : 70 mm/sec

Interface : Built-in USB and RS-232

Applications: Vending machine, self-service checkout kiosk

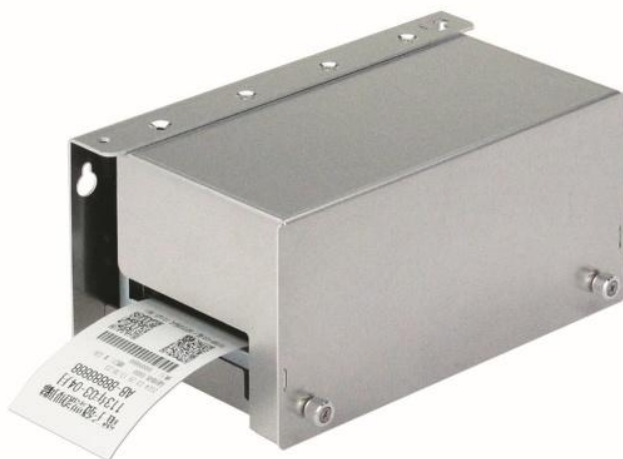

Applications (internal view)



Left eject



Right eject

Specification

Printing method		Thermal line		
Printing speed		70 mm/sec		
Command		ESC/POS		
Driver and SDK		Linux, Windows and Android SDK		
Character structure		Alphanumeric (Font A)	Alphanumeric (Font B)	Kanji
		12 x 24 dots	9 x 17 dots	24 x 24 dots
Columns		32 columns	42 columns	16 columns
Character size		1.50 (W) x 3.00 (H) mm	1.13 (W) x 2.13 (H) mm	3.00 (W) x 3.00 (H) mm
Density		203 dpi		
Fonts		Multilingual code page x 46, Chinese, Japanese, Thai and Korean		
Bar code		UPC-A, UPC-E, EAN13, EAN8, Code39, Code93, Codabar, Code128, ITF and QR code		
Detectors		Paper end, Paper near end, Printer head open and overheat, Cutter jam and Paper out		
Paper		Single-ply thermal paper roll		
Paper width		58 mm		
Paper thickness		0.05 ~ 0.06 mm		
Paper roll size		57.5±0.5 (W) x 80 (Dia) mm		
Drawer output		1		
Reliability	Head	50 km		
	Cutter	1,000,000 times		
Ext. Flash		4M bytes		
Power supply		+12 VDC / 3 A		
Interface		Built-in USB and RS-232C		
Weight		1.2 kg		
Dimensions		202 (W) x 96 (D) x 113 (H) mm		
Temperature	Operating	0 ~ 45°C		
	Storage	-20 ~ 60°C		
Humidity	Operating	10 ~ 90 %RH		
	Storage	10 ~ 90 %RH		