


# Line Thermal Printer



## WP-T8009 MQTT Printer

Interface: USB and Ethernet (MQTT)

Printing speed: 220 mm/sec

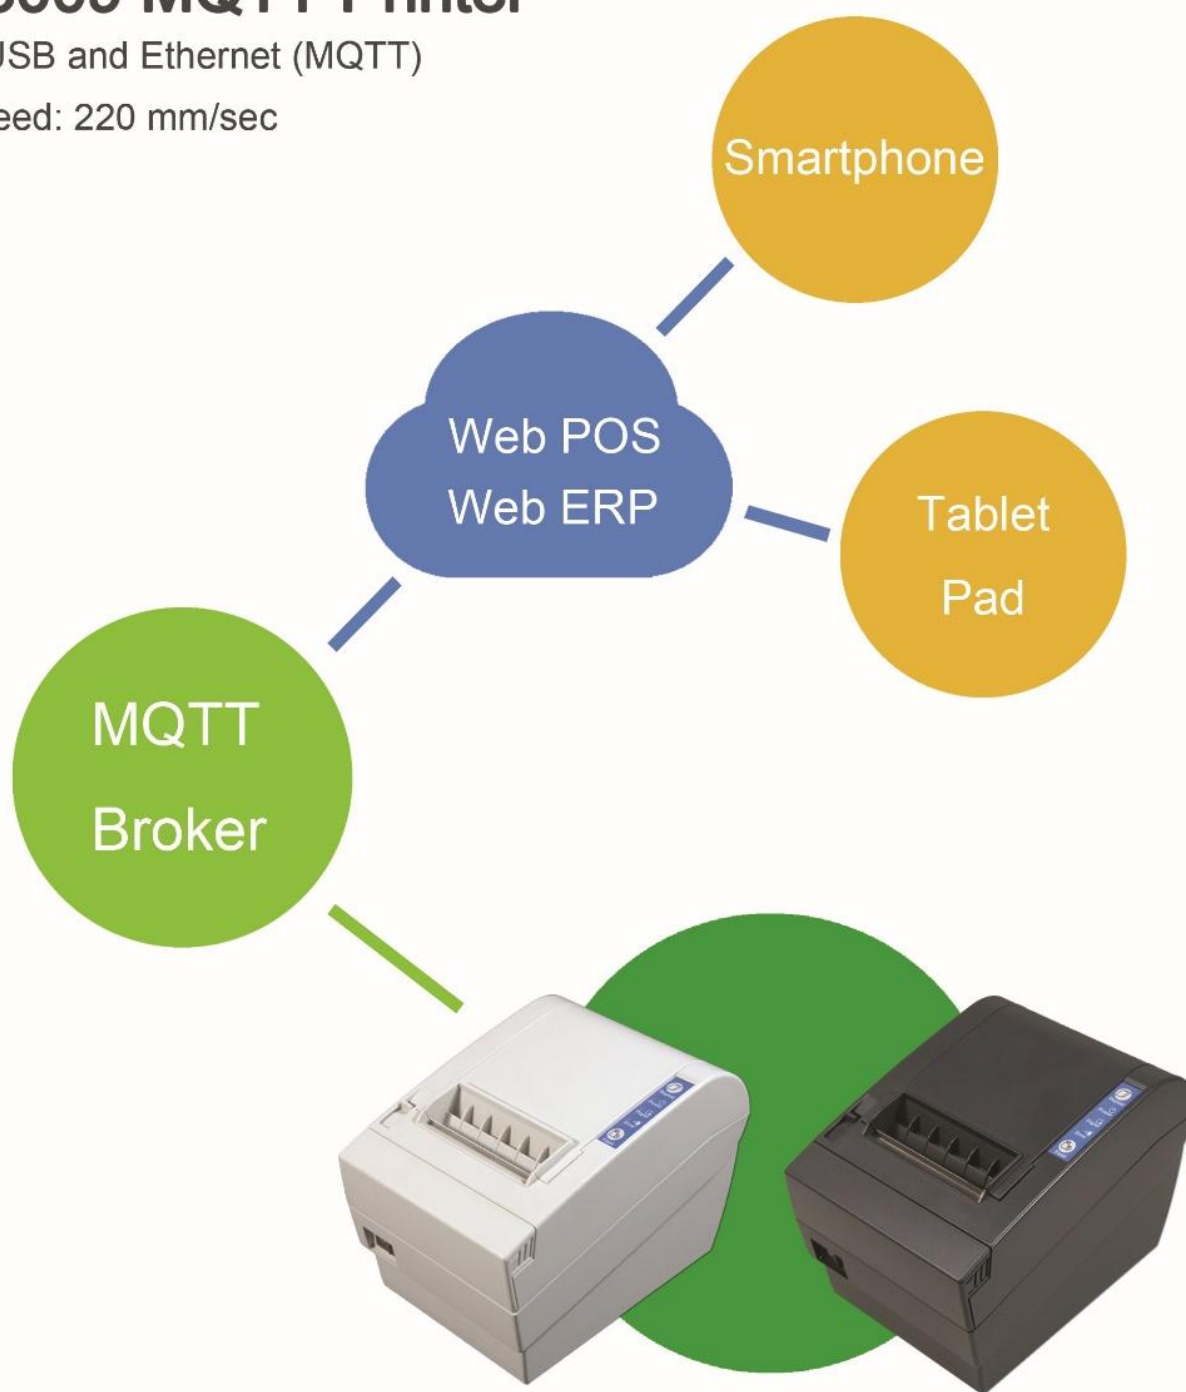

### Specification

|                     |               |                                                                        |                            |                         |
|---------------------|---------------|------------------------------------------------------------------------|----------------------------|-------------------------|
| Command             |               | WinPOS Smart Printing or ESC/POS                                       |                            |                         |
| Character structure |               | Alphanumeric (Font A)                                                  | Alphanumeric (Font B)      | Kanji                   |
|                     |               | 12 x 24 dots                                                           | 9 x 17 dots                | 24 x 24 dots            |
| Columns             | 80 mm / 58 mm | 48 columns / 34 columns                                                | 64 columns / 45 columns    | 24 columns / 17 columns |
| Character size      |               | 1.50 (W) x 3.00 (H) mm                                                 | 1.13 (W) x 2.13 (H) mm     | 3.00 (W) x 3.00 (H) mm  |
| Fonts               |               | Multilingual code page x 46 and Unicode                                |                            |                         |
| Detectors           |               | Paper end, Paper near end, Cover, Printer head overheat and Cutter jam |                            |                         |
| Paper width         |               | 80 mm                                                                  | 58 mm                      |                         |
| Paper roll size     |               | 79.5±0.5 (W) x 83 (Dia) mm                                             | 57.5±0.5 (W) x 83 (Dia) mm |                         |
| Reliability         | Head          | 100 km or more                                                         |                            |                         |
|                     | Cutter        | 1,000,000 times                                                        |                            |                         |
| Memory              | Ext. SRAM     | 256K bytes                                                             |                            |                         |
|                     | Ext. Flash    | 8M bytes                                                               |                            |                         |
| Interface           |               | Built-in USB and Ethernet (MQTT)                                       |                            |                         |